



Cambridge IGCSE™

COMPUTER SCIENCE

0478/21

Paper 2 Algorithms, Programming and Logic

May/June 2026

MARK SCHEME

Maximum Mark: 75

Published

This mark scheme contains the instructions and marking guidance that our examiners used to mark candidate responses for this component.

Before they start marking, examiners complete a standardisation process. They review a range of candidate responses and discuss the mark scheme in detail to agree which answers can and cannot be accepted. Examiners award marks where it is clear that candidate responses have met the requirements of the mark scheme. These requirements may vary between different components or different versions of the same component, depending on the exact requirements of the question and the candidate responses seen during the standardisation process.

Sometimes, our mark schemes may allow marks to be awarded to responses which contain elements that are factually incorrect or for content not covered by the syllabus. We do this in response to the demands of a specific question to support candidates and make sure that our assessments are fair. However, these allowances should not be used as a guide for teaching and learning.

We cannot discuss the mark scheme with schools, and we recommend that schools read the mark scheme together with the assessment material and the Principal Examiner Report for Teachers.

This document consists of **20** printed pages.

General marking principles

All examiners must apply these marking principles when marking candidate responses.

1	Examiners must award marks for each response in line with: <ul style="list-style-type: none"> the specific content defined in the mark scheme the specific skills defined in the mark scheme or in the level descriptions the standard of response required as exemplified by the standardisation scripts.
2	Examiners must award whole marks (not half marks, or other fractions).
3	Examiners must award marks positively . This means that: <ul style="list-style-type: none"> marks are not deducted for errors or omissions marks are awarded for correct/valid answers as defined in the mark scheme and also for other valid answers which go beyond the scope of the syllabus and mark scheme referring to your team leader as appropriate the quality of spelling, punctuation and grammar are judged only when the mark scheme indicates that these features are specifically assessed in the question. However, the meaning of all responses must be unambiguous.
4	Examiners must consistently apply the requirements of the mark scheme and any rules for what to do when candidates have not followed instructions correctly.
5	Examiners must use the full range of marks defined in the mark scheme, unless limited by the quality of the candidate responses seen.
6	Examiners must award marks according to the mark scheme and must not award marks with grade thresholds or grade descriptions in mind.

Annotations guidance for centres

Examiners use a system of annotations as a shorthand for communicating their marking decisions to one another. Examiners are trained during the standardisation process on how and when to use annotations. The purpose of annotations is to inform the standardisation and monitoring processes and guide the supervising examiners when they are checking the work of examiners within their team. The meaning of annotations and how they are used is specific to each component and is understood by all examiners who mark the component.

We publish annotations in our mark schemes to help centres understand the annotations they may see on copies of scripts. Note that there may not be a direct correlation between the number of annotations on a script and the mark awarded. Similarly, the use of an annotation may not be an indication of the quality of the response.

The annotations listed below were available to examiners marking this component in this series.

Annotations

Annotation	Meaning
	Correct point
	Incorrect point
	Follow through
	Repetition
	Ignore
	Benefit of doubt given
	Content of response too vague
	Not answered question
	Omission
	Section not relevant

Annotation	Meaning
	Section incorrect
Highlighter	Highlights part of the answer or shows structure of complex answers
SEEN	Page or response seen by examiner
A2	AO2 mark
A3	AO3 mark
NE	Not enough
R1	Required item one
R2	Required item two
R3	Required item three
 1	Correct awarding one mark
 2	Correct awarding two marks
 3	Correct awarding three marks
 4	Correct awarding four marks
 5	Correct awarding five marks
 6	Correct awarding six marks
 7	Correct awarding seven marks
 8	Correct awarding eight marks
 9	Correct awarding nine marks

Mark scheme abbreviations

/	separates alternative words / phrases within a marking point
//	separates alternative answers within a marking point
<u>underline</u>	actual word given must be used by candidate (grammatical variants accepted)
max	indicates the maximum number of marks that can be awarded
()	the word / phrase in brackets is not required, but sets the context
MP	mark point

Note: No marks are awarded for using brand names of software packages or hardware.

Question	Answer	Marks	Guidance
1	D	1	

Question	Answer	Marks	Guidance
2	One mark for each correct operator 1 > 2 <= 3 AND 4 NOT	4	Order not important

Question	Answer	Marks	Guidance																
3	One mark for each data type: <table border="1"> <thead> <tr> <th>variable</th><th>description</th><th>example data</th><th>data type</th></tr> </thead> <tbody> <tr> <td>Age</td><td>The age of the student.</td><td>16</td><td>integer</td></tr> <tr> <td>TelephoneNumber</td><td>The telephone number of the student.</td><td>+44 7846398573</td><td>string</td></tr> <tr> <td>Teenager</td><td>Whether the student is a teenager or not</td><td>TRUE</td><td>Boolean</td></tr> </tbody> </table>	variable	description	example data	data type	Age	The age of the student.	16	integer	TelephoneNumber	The telephone number of the student.	+44 7846398573	string	Teenager	Whether the student is a teenager or not	TRUE	Boolean	3	
variable	description	example data	data type																
Age	The age of the student.	16	integer																
TelephoneNumber	The telephone number of the student.	+44 7846398573	string																
Teenager	Whether the student is a teenager or not	TRUE	Boolean																

Question	Answer	Marks	Guidance
4	<p>One mark for each correct completion</p> <pre> Last ← <u>50</u> REPEAT Swap ← <u>FALSE</u> FOR <u>Index</u> ← 1 TO Last - 1 IF Names[Index] > Names[Index + 1] THEN Temp ← Names[Index] Names[Index] ← Names[Index + 1] Names[Index + 1] ← Temp Swap ← TRUE ENDIF NEXT Index Last ← Last - 1 UNTIL <u>NOT // False =</u> Swap OR Last = 1 </pre>	4	

Question	Answer	Marks	Guidance
5(a)	<p>One mark for correct use of <code>RANDOM() * 999 + 1</code> One mark for assignment to <code>GeneratedNumber</code> in attempt to randomise number</p> <pre>GeneratedNumber ← RANDOM() * 999 + 1</pre>	2	Ignore use of ROUND, unless used to produce the correct answer

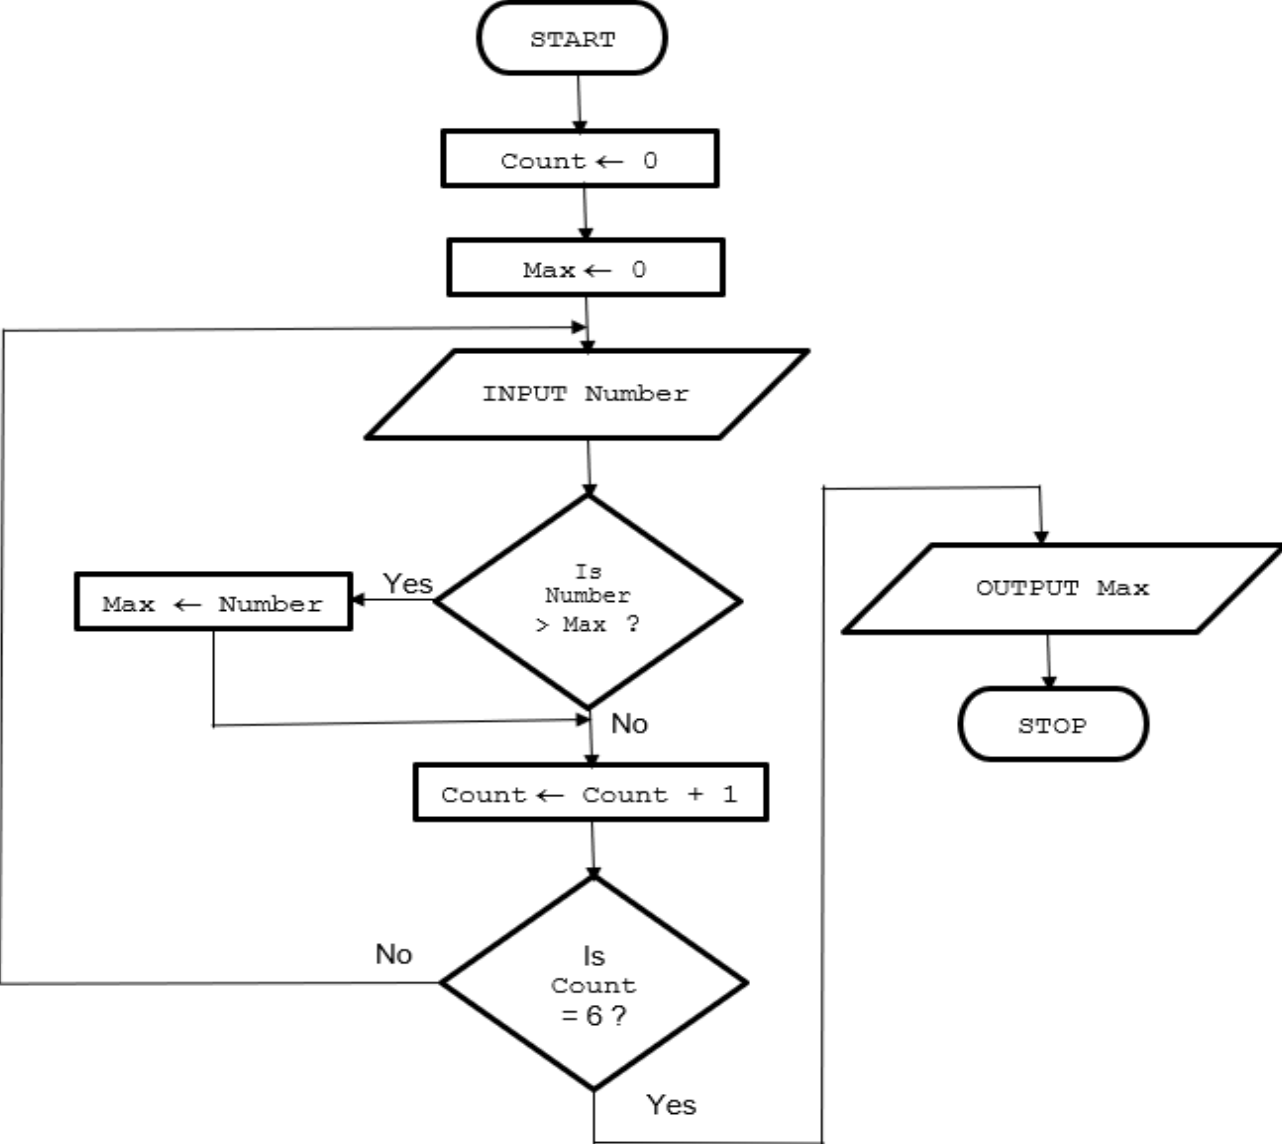
Question	Answer	Marks	Guidance
5(b)	<p>One mark for correct use of UCASE One mark for correct use of SUBSTRING One mark for assignment to Temp of attempt to extract from LastName and/or convert to upper case</p> <pre>Temp ← UCASE (SUBSTRING (LastName, 1, 2))</pre> <p>OR</p> <pre>Temp ← SUBSTRING (LastName, 1, 2)</pre> <pre>Temp ← UCASE (Temp)</pre>	3	Allow first character of the string to start at 0
5(c)	<p>One mark for each mark point</p> <ul style="list-style-type: none"> • Correct opening of file • Correct writing to file • Correct closing of file <pre>OPENFILE "Username.txt" FOR WRITE</pre> <pre>WRITEFILE "Username.txt", NewUsername</pre> <pre>CLOSEFILE "Username.txt"</pre>	3	If missing quotation marks from file or Username.txt not used, penalise once and FT
5(d)	<p>One mark for each correct identification and one for each correct description</p> <ul style="list-style-type: none"> • Double entry (1) enter data twice and only accept identical value/automatic check by computer (1) • Visual check (1) looks at the data that has been entered and confirm it matches (1) 	4	

Question	Answer	Marks	Guidance
6	<p>One mark for each correct identification and one for each correct description</p> <ul style="list-style-type: none"> FOR (Loop) (1) iterates a pre-determined number of times (1) REPEAT (UNTIL) (1) checks the condition at the end of the loop//will always iterate once (1) 	4	

Question	Answer	Marks	Guidance
7	<p>One mark for each line identified and correction given.</p> <p>Line 3 – should be <code>DECLARE Average : REAL</code> Line 9 – should be <code>WHILE Number <> -1 AND Counter <= 100 DO</code> Line 11 – should be <code>Total ← Total + Number // Total ← Total + Values[Counter]</code> Line 16 – should be <code>Average ← Total/Counter</code></p> <pre> 01 DECLARE Counter : INTEGER 02 DECLARE Total : INTEGER 03 DECLARE Average : REAL 04 DECLARE Values : ARRAY[1:100] OF INTEGER 05 Counter ← 1 06 Total ← 0 07 OUTPUT "Please enter a positive whole number or -1 " 08 INPUT Number 09 WHILE Number <> -1 AND Counter <= 100 DO 10 Values[Counter] ← Number 11 Total ← Total + Number // Values[Counter] 12 Counter ← Counter + 1 13 INPUT Number 14 ENDWHILE 15 Counter ← Counter - 1 16 Average ← Total / Counter 17 OUTPUT "The average is ", Round(Average, 2) </pre>	4	

Question	Answer	Marks	Guidance																																				
8(a)	<p>One mark for each mark point:</p> <ul style="list-style-type: none"> A XOR B B AND NOT C correct expression: X = (A XOR B) OR (B AND NOT C) // X = A XOR B OR B AND NOT C 	3	Allow FT if either MP1 or MP2 incorrect for MP3																																				
8(b)	<table border="1"> <thead> <tr> <th>A</th><th>B</th><th>C</th><th>X</th></tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>1</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>0</td></tr> </tbody> </table> <p>4 marks for 8 correct outputs 3 marks for 6/7 correct outputs 2 marks for 4/5 correct outputs 1 mark for 2/3 correct outputs</p>	A	B	C	X	0	0	0	0	0	0	1	0	0	1	0	1	0	1	1	1	1	0	0	1	1	0	1	1	1	1	0	1	1	1	1	0	4	
A	B	C	X																																				
0	0	0	0																																				
0	0	1	0																																				
0	1	0	1																																				
0	1	1	1																																				
1	0	0	1																																				
1	0	1	1																																				
1	1	0	1																																				
1	1	1	0																																				

Question	Answer	Marks	Guidance								
9(a)(i)	As MemberName may be repeated/not unique	1									
9(a)(ii)	MemberID	1									
9(b)	<p>One mark for two correct data types, two marks for three correct data types</p> <table><tr><th>field</th><th>data type</th></tr><tr><td>Distance</td><td>Integer //Real//text//alphanumeric</td></tr><tr><td>Date</td><td>Date/Time //text//alphanumeric</td></tr><tr><td>MemberID</td><td>Text //alphanumeric</td></tr></table>	field	data type	Distance	Integer //Real//text//alphanumeric	Date	Date/Time //text//alphanumeric	MemberID	Text //alphanumeric	2	Ignore minor spelling errors
field	data type										
Distance	Integer //Real//text//alphanumeric										
Date	Date/Time //text//alphanumeric										
MemberID	Text //alphanumeric										
9(c)	<p>One mark for each correct line</p> <p>SELECT MemberName FROM SWIMMERS WHERE Distance >= 1 500;</p>	3									

Question	Answer	Marks	Guidance
10(a)	<p>Example:</p>  <pre> graph TD Start([START]) --> InitCount[Count ← 0] InitCount --> InitMax[Max ← 0] InitMax --> Input[/INPUT Number/] Input --> Decision1{Is Number > Max ?} Decision1 -- Yes --> UpdateMax[Max ← Number] UpdateMax --> Decision1 Decision1 -- No --> IncrementCount[Count ← Count + 1] IncrementCount --> Decision2{Is Count = 6 ?} Decision2 -- No --> Input Decision2 -- Yes --> Output[/OUTPUT Max/] Output --> Stop([STOP]) </pre>	6	<p>Allow structured English if it makes sense.</p> <p>Must use correct flow chart symbols</p> <p>Alternative method is one pass of bubble sort – comparing adjacent and moving largest to end</p> <p>Allow input into an array</p>

Question	Answer	Marks	Guidance
10(a)	<p>One mark for each mark point</p> <p>Max five marks from:</p> <ul style="list-style-type: none"> initialising <code>Max/highest</code> and/or <code>Count</code> input of number checking if number greater than <code>Max</code> / adjacent array elements / numbers with correct labels updating <code>Max</code> or <code>Count</code> checking number of entries is equal to 6 // entry of six numbers outputting correct <code>Max</code> value <p>One mark for complete flow lines using arrows for attempt at finding highest number; flow chart must terminate at stop/end</p>		
10(b)	<p>One mark for each mark point</p> <ul style="list-style-type: none"> adding a new decision box with <code>IS Number > 0 ? ...</code> ... after <code>INPUT Number</code> looping back to before <code>INPUT Number</code> 	3	Allow diagram as answer, accept alternative corrections

Question	Answer	Marks	Guidance
11	<p>One mark for each mark point</p> <ul style="list-style-type: none"> defining FUNCTION <code>Power</code> with ENDFUNCTION and RETURNS INTEGER/REAL defining the parameters correctly correct calculation return the calculated value correct function call <p>Example:</p> <pre>FUNCTION Power(FirstNumber : INTEGER, SecondNumber : INTEGER) RETURNS INTEGER RETURN FirstNumber ^ SecondNumber ENDFUNCTION</pre> <p>Function call:</p> <pre>Value ← Power(A, B)</pre> <p>Alternative calculations:</p> <pre>Num ← 1 FOR I ← 1 TO SecondNumber Num ← Num * FirstNumber NEXT I</pre> <pre>Num ← FirstNumber FOR I ← 1 TO SecondNumber - 1 Num ← Num * FirstNumber NEXT I</pre>	5	

Question	Answer	Marks	Guidance
12	<p>Use the tables for AO2 and AO3 below to award a mark in a suitable band using a best fit approach. Then add up the total.</p> <p>Marks are available for:</p> <ul style="list-style-type: none"> • AO2 (maximum 9 marks) • AO3 (maximum 6 marks) <p>Data Structures required names shown underlined must be used as given in the scenario arrays or lists <u>Sunshine</u>, <u>MonthDays</u> (Year and Month may be seen but no requirement to store)</p> <p>Requirements (techniques) R1 input year, calculates if leap year, updates <code>MonthDays[]</code> if appropriate, input month name (selection and input) R2 inputs and validates the daily minutes for the month, calculates the total minutes and finds the highest daily sunshine (validation, iteration, selection, totalling)</p>	15	

Question	Answer	Marks	Guidance
12	<p>R3 outputs the year, month, highest daily sunshine for the month, calculate and output the total sunshine in hours and minutes (output)</p> <p>Example 15-mark answer in pseudocode.</p> <p>// programming techniques of iteration, selection, totalling, and output are used</p> <pre> Hours ← 0 Minutes ← 0 MaxHours ← 0 MaxMinutes ← 0 Max ← 0 Days ← 0 Total ← 0 // R1 //////////////////////////////////// OUTPUT "Please enter a year" INPUT Year IF MOD(Year, 4) = 0 // updating array if leap year THEN MonthDays[2] = 29 ELSE MonthDays[2] = 28 ENDIF // entering a month and assigning the // number of days to variable OUTPUT "Please enter a month" INPUT Month Month1 ← LCASE(Month) // converting to lowercase for use in case // statement - keeping original for output </pre>		

Question	Answer	Marks	Guidance
12	<pre>// R2 //////////////////////////////////// CASE OF Month1 "january" : Days ← MonthDays[1] "february" : Days ← MonthDays[2] "march" : Days ← MonthDays[3] ENDCASE FOR Count ← 1 to Days // inputting sunshine for each day and validating REPEAT // in a valid range OUTPUT "Please enter sunshine for day in minutes ", Count INPUT Sun UNTIL Sun >= 0 AND Sun <= 1440 Sunshine[Count] ← Sun // storing in array Total ← Total + Sun // totalling sunshine IF Sun > Max THEN Max ← Sun // updating highest daily ENDIF NEXT Count // R3 //////////////////////////////////// Hours ← DIV(Total, 60) // converting to hours and minutes for total and Minutes ← MOD(Total, 60) // daily // MaxHours ← DIV(Max, 60) // if learner converts highest daily // MaxMinutes ← MOD(Max, 60)</pre>		

Question	Answer	Marks	Guidance																			
12	<pre>// outputting results OUTPUT "The sunshine for ", Month, " in the year ", Year OUTPUT "Total sunshine was ", Hours, " hours and ", Minutes, " minutes" OUTPUT "The highest daily sunshine was ", MaxHours, " hours and ", MaxMinutes, " minutes"</pre> <table border="1"> <tr> <th colspan="4">Marking Instructions in italics</th></tr> <tr> <th colspan="4">AO2: Apply knowledge and understanding of the principles and concepts of computer science to a given context, including the analysis and design of computational or programming problems</th></tr> <tr> <th>0</th><th>1–3</th><th>4–6</th><th>7–9</th></tr> <tr> <td rowspan="2">No creditable response.</td><td>At least one programming technique has been used. <i>Any use of selection, iteration, counting, totalling, input and output.</i></td><td>Some programming techniques used are appropriate to the problem. <i>More than one technique seen applied to the scenario, check the list of techniques needed.</i></td><td>The range of programming techniques used is appropriate to the problem. <i>All criteria stated for the scenario have been covered by the use of appropriate programming techniques, check the list of techniques needed.</i></td></tr> <tr> <td>Some data has been stored but not appropriately. <i>Any use of variables or arrays or other language dependent data structures e.g. Python lists.</i></td><td>Some of the data structures chosen are appropriate and store some of the data required. <i>More than one data structure used to store data required by the scenario.</i></td><td>The data structures chosen are appropriate and store all the data required. <i>The data structures used store all the data required by the scenario.</i></td></tr> </table>	Marking Instructions in italics				AO2: Apply knowledge and understanding of the principles and concepts of computer science to a given context, including the analysis and design of computational or programming problems				0	1–3	4–6	7–9	No creditable response.	At least one programming technique has been used. <i>Any use of selection, iteration, counting, totalling, input and output.</i>	Some programming techniques used are appropriate to the problem. <i>More than one technique seen applied to the scenario, check the list of techniques needed.</i>	The range of programming techniques used is appropriate to the problem. <i>All criteria stated for the scenario have been covered by the use of appropriate programming techniques, check the list of techniques needed.</i>	Some data has been stored but not appropriately. <i>Any use of variables or arrays or other language dependent data structures e.g. Python lists.</i>	Some of the data structures chosen are appropriate and store some of the data required. <i>More than one data structure used to store data required by the scenario.</i>	The data structures chosen are appropriate and store all the data required. <i>The data structures used store all the data required by the scenario.</i>		
Marking Instructions in italics																						
AO2: Apply knowledge and understanding of the principles and concepts of computer science to a given context, including the analysis and design of computational or programming problems																						
0	1–3	4–6	7–9																			
No creditable response.	At least one programming technique has been used. <i>Any use of selection, iteration, counting, totalling, input and output.</i>	Some programming techniques used are appropriate to the problem. <i>More than one technique seen applied to the scenario, check the list of techniques needed.</i>	The range of programming techniques used is appropriate to the problem. <i>All criteria stated for the scenario have been covered by the use of appropriate programming techniques, check the list of techniques needed.</i>																			
	Some data has been stored but not appropriately. <i>Any use of variables or arrays or other language dependent data structures e.g. Python lists.</i>	Some of the data structures chosen are appropriate and store some of the data required. <i>More than one data structure used to store data required by the scenario.</i>	The data structures chosen are appropriate and store all the data required. <i>The data structures used store all the data required by the scenario.</i>																			

Question	Answer				Marks	Guidance
12	Marking Instructions in italics					
	AO3: Provide solutions to problems by: <ul style="list-style-type: none">evaluating computer systemsmaking reasoned judgementspresenting conclusions					
	0	1–2	3–4	5–6		
	No creditable response.	Program seen without relevant comments.	Program seen with some relevant comment(s).	The program has been fully commented.		
		Some identifier names used are appropriate. <i>Some of the data structures used have meaningful names.</i>	The majority of identifiers used are appropriately named. <i>Most of the data structures used have meaningful names.</i>	Suitable identifiers with names meaningful to their purpose have been used throughout. <i>All of the data structures used have meaningful names.</i>		
		The solution is illogical.	The solution contains parts that may be illogical.	The program is in a logical order.		
		The solution is inaccurate in many places. <i>Solution contains few lines of code with errors that attempt to perform a task given in the scenario.</i>	The solution contains parts that are inaccurate. <i>Solution contains lines of code with some errors that logically perform tasks given in the scenario. Ignore minor syntax errors.</i>	The solution is accurate. <i>Solution logically performs all the tasks given in the scenario. Ignore minor syntax errors.</i>		

Question	Answer				Marks	Guidance
12	0	1-2	3-4	5-6		
		The solution attempts at least one of the requirements. <i>Solution contains lines of code that attempt at least one task given in the scenario.</i>	The solution meets most of the requirements. <i>Solution contains lines of code that perform most tasks given in the scenario.</i>	The solution meets all the requirements given in the question. <i>Solution performs all the tasks given in the scenario.</i>		